

# NORMAND

## UNISOL LAND LEVELLER

GENERAL SPECIFICATIONS	32 RD3	34 RD3	36 RD3
Recommended horsepower (hp)	140 @ 300	160 @ 300	180 @ 300
Width - open (ft)	32'	34'	36'
Width - close (ft, in.)	10' 7"	10' 7"	10' 7"
Length - open (ft, in.)	40' 6"	40' 6"	40' 6"
Length - close (ft)	37'	38'	39'
Blade height (in.)	28.5"	28.5"	28.5"
Transport tire	16.5L x 16.1	16.5L x 16.1	16.5L x 16.1
3-wheel steerable tandem	Standard	Standard	Standard
Hitch (Class 3)	Standard	Standard	Standard
Industrial-type cutting edge	Standard	Standard	Standard
Triangle holder	Standard	Standard	Standard
Holder for hydraulic hoses	Standard	Standard	Standard
Reflecting strips	Standard	Standard	Standard
Proportional hydraulic circuit	Standard	Standard	Standard
RF control	Standard	Standard	Standard
Laser pole - GPS	Option	Option	Option
Antifriction Teflon (strongly recommended)	Option	Option	Option
Hardox 450 finishing teeth	Option	Option	Option
Teeth storage compartment	Option	Option	Option
Approximative weight (lbs)	14,000 lbs	14,250 lbs	14,500 lbs



### NORMAND WARRANTY

Every NORMAND product is guaranteed against manufacturing and raw material defects (excluding tires, hubs, wheels, engines and hydraulic cylinders which are covered by the OEM warranty) for a full year from the date of purchase, provided that said product has not been modified or abused in any way. We will replace or repair any defective part at no cost if they are returned F.O.B. at our plant in Saint-Pascal-de-Kamouraska, Quebec. Our obligations are limited to the replacement and/or repair of the defective part.

# NORMAND

Co Ltd.

**Normand Co. Ltd**  
340, Tache Street  
Saint-Pascal (Quebec)  
Canada G0L 3Y0

Tel. : (418) 492-2712  
**1-888-666-7626**  
**1-888-6NORMAN**  
Fax : (418) 492-9363

Email : [normand@cienormand.com](mailto:normand@cienormand.com)  
Web site : [www.cienormand.com](http://www.cienormand.com)



*The specifications listed above are subject to change without notice.*

**DEALER**



En-Communication inc. 819.472.8249 | Printed Canada © 2008

© Normand™ Co.Ltd 2008 All Rights Reserved

*Quality - Sturdiness - Reliability*

**Sturdy, uniquely designed and exceptionally versatile, Normand land levellers are both steerable and retractable while sitting on wheels.**

They offer little resistance and thus require significantly less power than other types of graders, allowing you to use a smaller-capacity tractor.

These wheeled units are effective at levelling different types of soil, even organic soils like black earth and peat lands.

Also, the power steering ensures that the wheels remain parallel with the tractor at all times, regardless of the angle of the leveller.

Normand land levellers are fully hydraulic and allow 4 different mobility options in addition to a retracted position for road transport (a process that takes under 30 seconds). It's all perfectly controlled from the cabin thanks to a wireless operating device using radio frequencies. You will also appreciate the slant and curve of the blade, which combine to distribute the soil evenly from one end of the land leveller to the other.

**Maximum efficiency; that's what you're looking for!**



Wireless control with radio frequencies



Dual-axis pivoting hitch




Antifriction Teflon


Transport mode




Blade angle adjustment - vertical

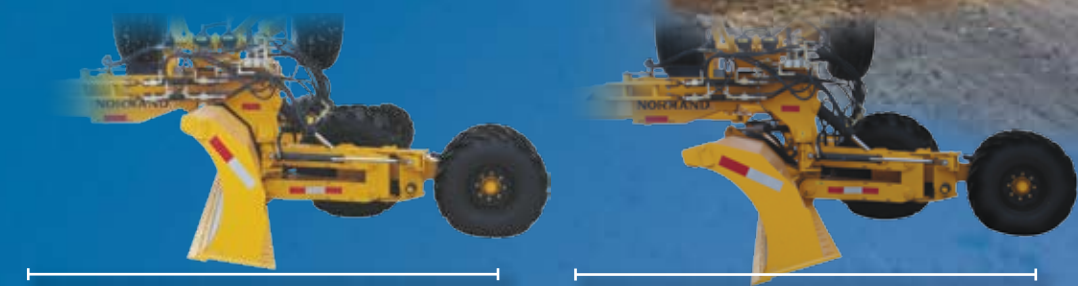

Blade angle adjustment - horizontal (from 15 to 30 degrees)

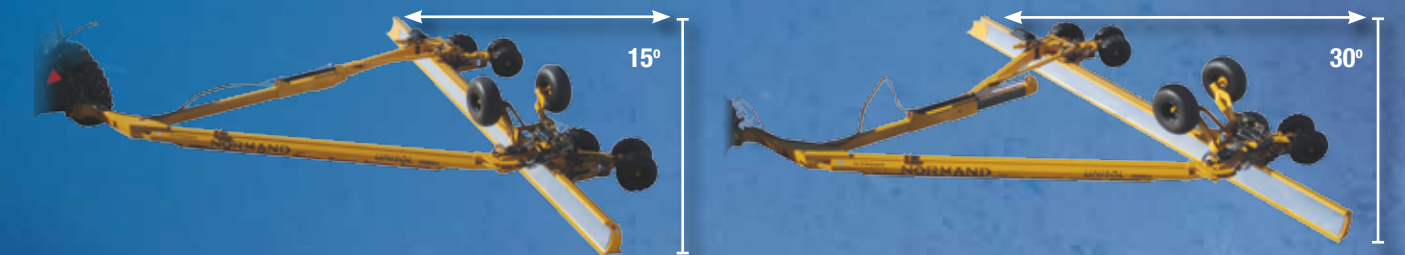

Blade slant adjustment

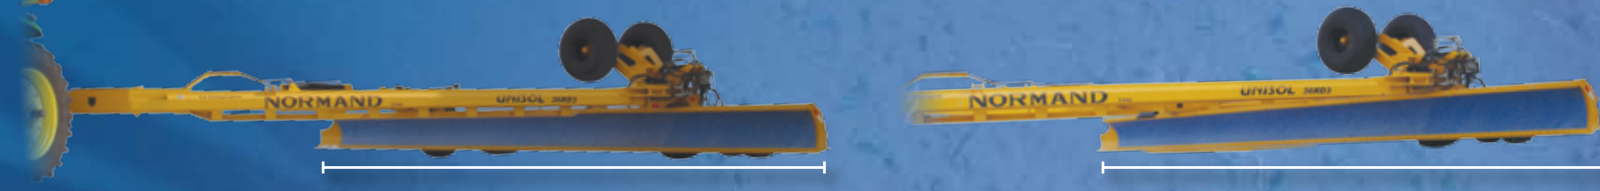

Hardox 450 removable finishing teeth with storage compartment



Industrial-type cutting edge

Hardox 450 blade sole