

Packers

4400 PACKER



www.KuhnNorthAmerica.com



Invest in Quality®

INCREASE YOUR PRODUCTIVITY

In order for crops to reach their maximum yield potential, a properly prepared seedbed is key. Air pockets, large dirt clods, and an uneven planting surface can all negatively impact your crop.

KUHN Krause packers pulverize clods, press down stones and eliminate air pockets in the soil, resulting in a superior seedbed to give your crop uniform emergence and even soil temperature right from the start.

Choose the KUHN Krause 4400 Packer for the best seedbed for your seed.

4400 PACKER in brief

Models	Working Width
4400-12	12'
4400-14	14'
4400-16	16'
4400-18	18'
4400-20	20' 4"
4400-22	22' 4"
4400-24	24' 4"
4400-26	26' 4"
4400-28	28' 4"
4400-30	30' 4"
4400-32	32' 4"
4400-34	34' 4"
4400-36	36' 4"
4400-38	38'
4400-40	40'
4400-42	42'
4400-44	44'
4400-46	46'



- 1 TELESCOPING TONGUE**
Standard on 28' through 46' sizes
- Enables tighter turns when the unit is pulled behind a tillage implement
 - Increases tongue length from 13'4" to 23'3"
 - Retractable for transport and storage

- 2 TONGUE LEVELING LINK**
Standard on all sizes
- Quick, easy field adjustments
 - Eliminates the need for "shim" adjustments

DUCTILE CAST WHEELS

- Excellent durability in rocky conditions
- Decrease maintenance

REVERSIBLE SCRAPERS

- Allow for operation in wetter soil conditions
- Adjustable and reversible for longer life

SUPERSEAL BEARINGS

- Ensure long life and rugged durability
- No need to disassemble gang for service
- No center-axle bearings

OPTIONAL "V" PACKERS

- 22-3/8" diameter by 1-3/4" wide on 7-1/4" spacing
- "Corrugated" field finish to fight wind erosion in sandy soil
- 1-1/2" diameter alloy shafts with SuperSeal Bearings

WALKING DUAL WHEELS


- Available on 38' to 46' sizes
- Provide even weight distribution during transport

FLEX-WING DESIGN


- Effectively follow field contours with packer wings that flex downward to 6° and upward to 45°



Specifications

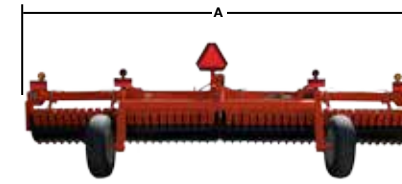

4400-12 to 4400-18

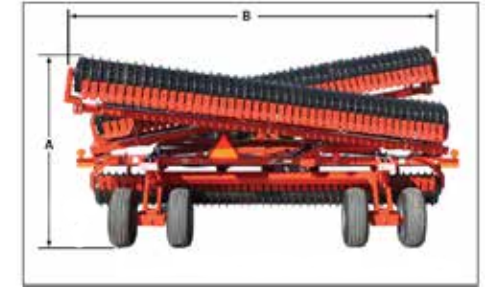

4400-20 to 4400-46

SPECIFICATIONS

MODELS	4400-12	4400-14	4400-16	4400-18	4400-20	4400-22	4400-24	4400-26	4400-28
--------	---------	---------	---------	---------	---------	---------	---------	---------	---------

DIMENSIONS

A Transport Width ¹	13' / 4 m	15' / 4.6 m	17' / 5.2 m	19' / 5.8 m	12'4" / 3.8 m				
B Transport Height ¹	N/A				Less than 8'4" / 2.5 m				

SPECIFICATIONS

Frame Type	Rigid				Folding				
Working Width ³	12' / 3.7 m	14' / 4.3 m	16' / 4.9 m	18' / 5.5 m	20'4" / 6.2 m	22'4" / 6.8 m	24'4" / 7.4 m	26'4" / 8 m	28'4" / 8.6 m
Approximate Weight (lbs/kg) ²	2,875 / 1 304	3,131 / 1 402	3,125 / 1 417	3,683 / 1 671	5,784 / 2 624	6,040 / 2 740	6,430 / 2 917	6,664 / 3 023	7,264 / 3 295

STANDARD EQUIPMENT

- Hitch	Clevis-Type 1-1/4" Pin Hole, Turnbuckle Leveling Link								
- Depth Control	4" x 10" Hydraulic Cylinder				4" x 16" Hydraulic Cylinder				
- Hydraulics	Royal Plate Plus [®] Cylinder Rods, Color Coded Hose Grips, Male ISO Couplers on Hydraulic Hoses								
- Center Section Tires	Two 9.5L x 15" 8-ply, Singles				Four 9.5L x 15" 8-ply, Rigid Duals				
- Axles	Notched Roller Gang: 4" x 19-1/2" Ductile Wheels Assembled on 6-5/8" Diameter Steel Pipe, Equipped with Reversible Scrapers and Regreasable SuperSeal Bearings								
- Safety	Tongue Jack, Slow Moving Vehicle Sign, High Visibility LED Transport Light Kit, Safety Chain								

SPECIFICATIONS

MODELS	4400-30	4400-32	4400-34	4400-36	4400-38	4400-40	4400-42	4400-44	4400-46
--------	---------	---------	---------	---------	---------	---------	---------	---------	---------

DIMENSIONS

A Transport Width ¹	12'4" / 3.8 m			13'10" / 4.2 m		16'1" / 4.9 m			
B Transport Height ¹	Less than 8'4" / 2.5 m								

SPECIFICATIONS

Frame Type	Folding								
Working Width ³	30'4" / 9.2 m	32'4" / 9.9 m	34'4" / 10.5 m	36'4" / 11.1 m	38' / 11.6 m	40' / 12.2 m	42' / 12.8 m	44' / 13.4 m	46' / 14 m
Approximate Weight (lbs/kg) ²	7,498 / 3 401	7,859 / 3 565	8,267 / 3 750	8,559 / 3 882	10,008 / 4 540	10,266 / 4 657	10,524 / 4	10,782 / 4 891	11,040 / 5 008

STANDARD EQUIPMENT

- Hitch	Clevis-Type 1-1/4" Pin Hole, Turnbuckle Leveling Link								
- Depth Control	4" x 16" Hydraulic Cylinder				Two 3" x 10" Hydraulic Cylinders				
- Hydraulics	Royal Plate Plus [®] Cylinder Rods, Color Coded Hose Grips, Male ISO Couplers on Hydraulic Hoses								
- Axles	Notched Roller Gang: 4" x 19-1/2" Ductile Wheels Packer: 6-5/8" Diameter Steel Pipe, Reversible Scrapers, Regreasable SuperSeal Bearings								
- Safety	Tongue Jack, Slow Moving Vehicle Sign, High Visibility LED Transport Light Kit, Safety Chain								
- Center Section	Four 9.5L x 15" 8-ply, Rigid Duals				Four 11L x 15" 12-ply, Walking Duals				

Specifications

ALL MODELS

Optional Equipment

Axles	"V" Packer Gang: 1-3/4 x 22" x 3/8" Assembled on 1-1/2" Diameter Alloy Shaft
-------	---

Operating Information









Recommended Operating Speed	5 - 7 mph / 8 - 12 km/h
Recommended Tractor Power Range ⁴	1 - 2 PTO Horsepower per Foot / .75 - 1.5 kW

¹ Approximate transport width, height and weight
² Approximate weight provided for models equipped with notched roller gang.
³ RTK working width
⁴ Estimates only. Horsepower requirements will vary by geography and soil type.


PRODUCT SYSTEMS

PRODUCT SYSTEMS

Seedbed Preparation

5635 Field Cultivator / 4400 Packer		
LANDSMAN® / 4400 Packer		
Disc Harrow / 4400 Packer		
EXCELERATOR® / 4400 Packer		

Most Complete Secondary Tillage Line on the Market

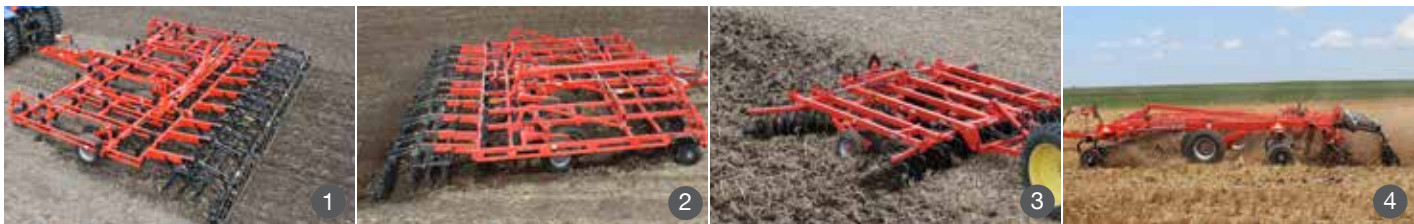

1. 5635 Field Cultivator / 2. LANDSMAN® 6205 / 3. 8215 Disc Harrow / 4. EXCELERATOR® 8005

For more information about your nearest **KUHN Krause** dealer and other **KUHN Krause** products, visit our website

www.KuhnNorthAmerica.com



Visit our YouTube channel to watch our latest product videos.



Your KUHN Krause dealer

KUHN KRAUSE, INC.

305 South Monroe Street
P.O. Box 2707
Hutchinson, KS 67504

Information given in this document is only for informational purposes and is non-contractual. Our machines are in compliance with North American safety standards. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices must be operated in accordance with the requirements indicated in the operator's manuals and assembly manuals. We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

Find us on

