



Fransgård SPR-Spreader




SPR-250
SPR-250H
SPR-350
SPR-350GA
SPR-800
SPR-800GA
SPR-1000
SPR-1000GA
SPR-1500
SPR-1500GA

Solid and versatile self-loading spreader, rotor spreads many different types of materials, e.g. coarse sand, crushed granite etc. The smallest model SPR-250 (not self-loading) has a ground-driven rotor and is therefore drive-dependent. All models have hydraulic-driven rotors. The spreaders are available with several different suspensions and large range of accessories are available. All models are available in painted or galvanised versions (except the SPR-250).

Fransgård



SPR-250 fitted with Tow bar (optional), 3-point suspension cat. I/II is standard. The spreader rotor is driven via the left wheel, and is fitted with studded tires which deactivate the drive on the roller when moving in reverse. The rotor action is deactivated via a fitting on the wheel.

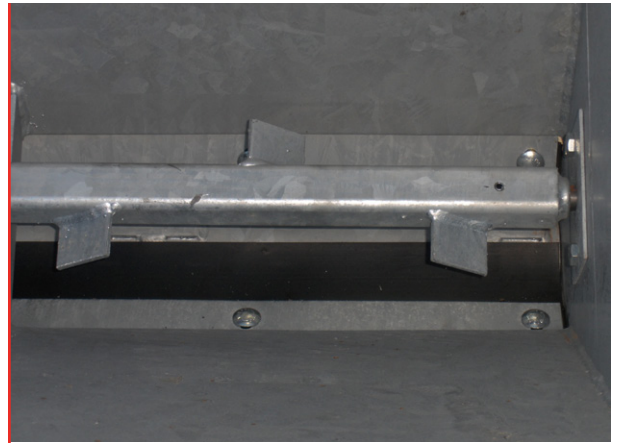


The hydraulic-driven agitator with slanted vanes ensures the material does not form a bridge in the machine.


Standard on all models except SPR-250/H




SPR-250H has a standard 3-point suspension cat. I/II. Spreader roller is driven by a hydraulic motor that requires a single double-acting valve outlet. The machine is ideal for a compact tractor.

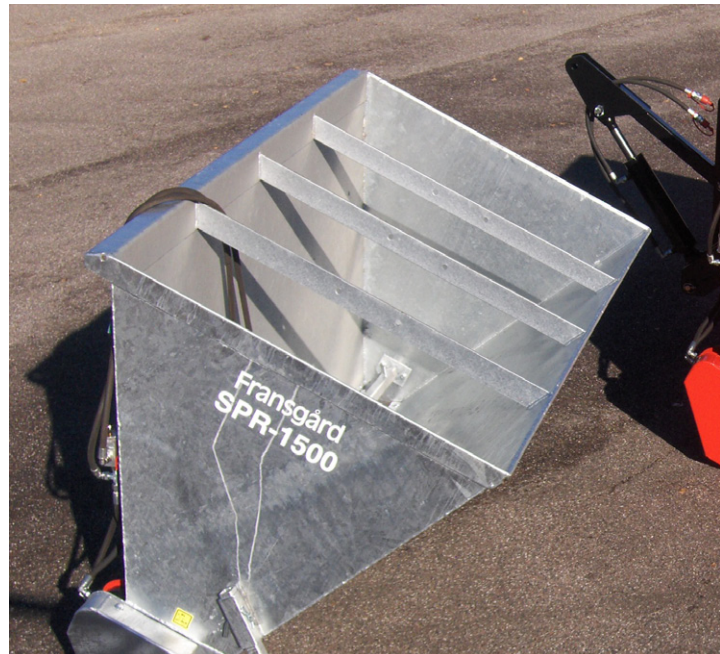

All self-loading models are delivered as a single version where body, roller and agitator are hot galvanised (GA). This means the machines have a very corrosive-resistant surface for extended product life.

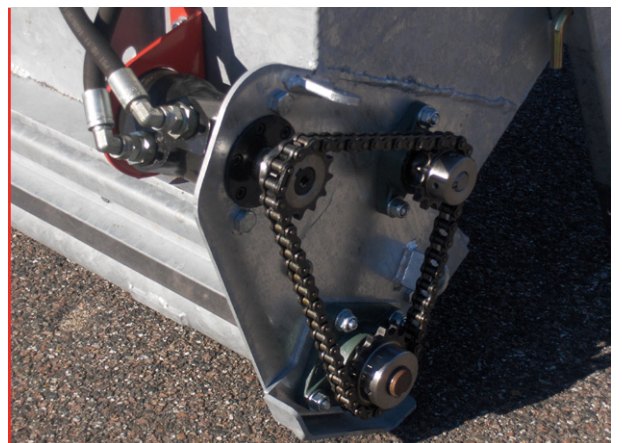

The powerful 250 cc hydraulic motor is well-protected in the rear of the machine and drives both the agitator and the roller via a reinforced 5/8" drive chain and hardened gear wheel (not the SPR-250).

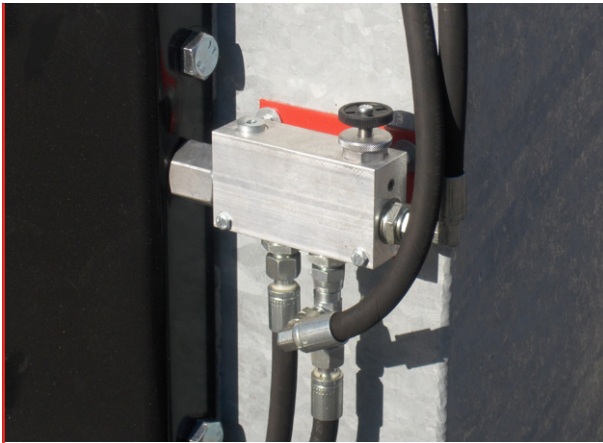


The powerful steel hydraulic flow control valve ensures optimal machine operation and easy rotor speed adjustment to deliver the required material volume.
Standard on all self-loading models.




The stone release mechanism prevents large stones from being trapped at the rotor. Four settings permit adjusting to the size of the material being used and enable rapid unloading.
Standard on all models except SPR-250/H.



All self-loading spreaders are feature Domex 420 Grade steel for the body, sturdy vertical wear rails and horizontal steel edges around the top.

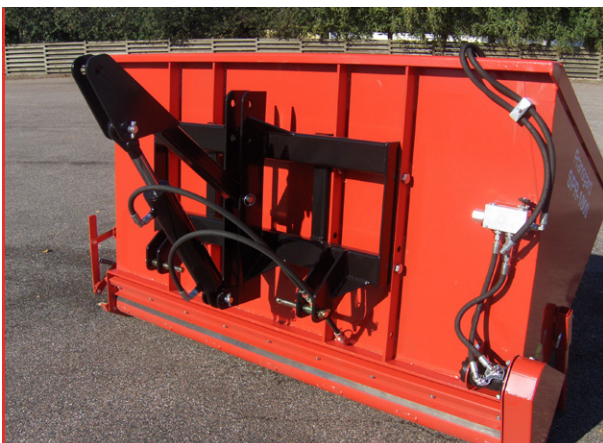

The large vertical standing loading cylinder (optional) fits all models with 3-point suspension and ensures efficient machine loading.
Also very easy to adjust for tractor hookup (not SPR-250H).

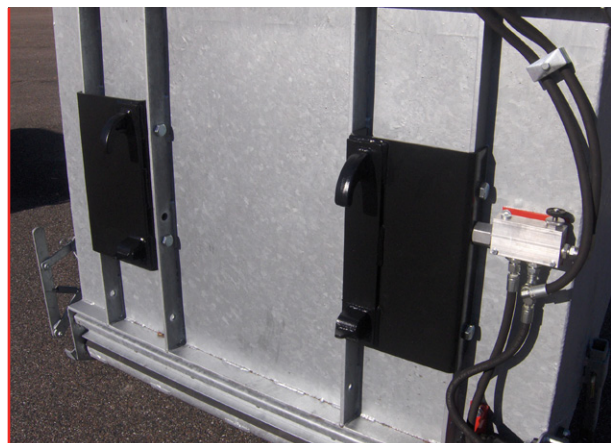


All self-loading spreaders are available with several suspensions that are easy to fit using strong bolts.
Suspension: SMS, EURO, 3-Point, A-frame, Volvo BM and Schäffer

Accessories:



Tarpaulin with stitched elastic edge. Available with all self-loading models. SPR-250/H fitted with elastic belt.

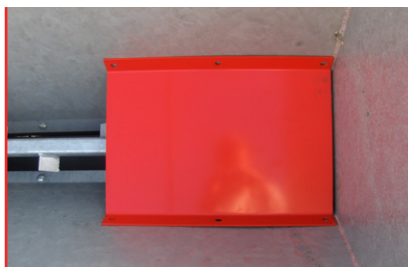

50 cm spread limiter fitted with bolts. Suitable for all self-loading models.



Safety guard fitted with bolts which can be folded up. Ensures that no unwanted items enter agitator and roller.



Vertical standing loading cylinder for 3-point suspension on all self-loading models.



Stone releaser for SPR-250/H ensures that material does not become trapped at the rotor.



Pull bar with ball coupling for SPR-250.

Also available from Fransgård:



Chain Mulcher FKR-150



Snow Blower V-230



Leveller GT-250HY

Technical Data:	SPR-250/250H	SPR-350/GA	SPR-800/GA	SPR-1000/GA	SPR-1500/GA
Working width	120 cm / 48"	120 cm / 48"	150 cm / 60"	200 cm / 80"	230 cm / 112"
Transport width	155/140 cm	135 cm	165 cm	215 cm	245 cm
Tank volume	250 L	350 L	800 L	1,000 L	1,500 L
Body dimensions top	56 x 120 cm	80 x 120 cm	106 x 150 cm	106 x 200 cm	115 x 230 cm
3-point hitch suspension	Standard	Optional	Optional	Optional	Optional
Stone releaser	Accessory	Standard	Standard	Standard	Standard
Rapid emptying	No	Standard	Standard	Standard	Standard
Self-loading	No	Standard	Standard	Standard	Standard
Hydraulic outlet	None/1 double	1 double	1 double	1 double	1 double
Hydraulic volume regulation	No/accessory	Standard	Standard	Standard	Standard
Agitator	No	Standard	Standard	Standard	Standard
Suspended/fixed	Tow bar/No	5 models	5 models	5 models	5 models
Deadweight	130 kg/285lb	215 kg / 475 lb	320 kg / 705 lb	350 kg / 770 lb	440 kg / 970 lb

Importer:

Dealer:

Manufacturer:

Fransgård Maskinfabrik A/S
 Fredbjergvej 132, DK-9640 Farsø
 Tlf. +45 98 63 21 22
 www.fransgard.dk