



BUSH HOG®

Single-Spindle Rotary Cutters

IF IT DOESN'T SAY
BUSH HOG®
IT JUST WON'T CUT IT™

BH100 SERIES | BH200-2 SERIES | BH300-2 SERIES |
BH400 SERIES | BH500 SERIES

 **BUSH HOG®**

10
YEAR
GEARBOX LIMITED
WARRANTY

ON ALL ROTARY CUTTERS!*
(purchased 1/1/2020 or later)

BH100 SINGLE-SPINDLES

BH100
SERIES

BH114 / BH115 / BH116

10
YEAR
GEARBOX LIMITED
WARRANTY




Bush Hog®'s Legendary Single-Spindle Rotary Cutters

The New BH100 Series picks up where the Razorback Series left off. Bush Hog®'s legendary durability and reliability is enhanced even further in the new light-duty BH100 Series. We've taken our quality to a new level in the BH100 Series by robotically welding the entire cutter. All welding is performed on the underside of the deck giving these cutters a clean, sleek appearance. All welds are applied at the same temperature, angle, and duration to ensure consistency from start to finish. Additional enhancements include a stronger gearbox stand and tailwheel caster fork, optional front chain shielding, and optional Cat. 1 Quick Hitch.

BH100 Series Features

The economically priced BH100 Series allows customers to take control of pesky weeds, grass, and small brush up to 1" in diameter while experiencing legendary Bush Hog® performance. As thousands of satisfied customers can attest, if it doesn't say Bush Hog®, it just won't cut it!

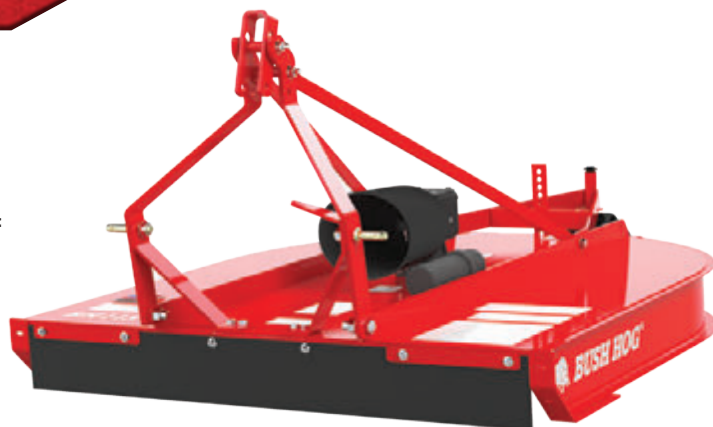

BH100 SERIES SINGLE-SPINDLE SPECIFICATIONS

| MODELS: | BH114 | BH115 | BH116 |
|------------------------|--|------------|------------|
| Cutting Width | 44" | 56" | 68" |
| Cutting Height | 2" - 11" | | |
| Cutting Capacity | 1" Diameter | | |
| Hitch | ASAE Cat. 1 Standard; Quick-Hitch Optional | | |
| Deck Thickness | 12 Gauge | | |
| Side Bands | "C" Channel, 10 Gauge x 8" | | |
| Gearbox | 60 HP* | | |
| Driveline | ASAE Category 3 | | |
| Driveline Protection | Slip Clutch or Shearpin | | |
| Blade Holder | Formed Pan | | |
| Blades | 1/2" x 3" Uplift | | |
| Blade Tip Speed | 15,904 fpm | 15,472 fpm | 14,307 fpm |
| Tires | 14 1/2" Laminated | | |
| Minimum Tractor PTO HP | 15 | 20 | 25 |
| Safety Deflectors | Front Rubber and Rear Metal Band Standard; Front Chains Optional | | |
| Warranty | 10 Year Gearbox Limited Warranty 1 Year Machine Limited Warranty | | |

*Gearbox rating based on field performance.

BH200-2 SINGLE-SPINDLES

BH200-2 SERIES
ROTARY CUTTERS

BH215-2 / BH216-2 / BH217-2



10
YEAR
GEARBOX LIMITED
WARRANTY

Bush Hog®'s Legendary Single-Spindle Rotary Cutters

Building on the success of the BH200 Series, the new BH200-2 Series Rotary Cutters combine the legacy and reputation of Bush Hog®'s Single Spindles with new, innovative design updates. These updated cutters now have full-length 10ga strongbacks designed to reinforce the entire length of the cutter, front to back, especially enhancing the rear half of the cutter and tailwheel structure. Reinforcement plates have been added to the bottom of the rear sidebands, providing extra strength in this critical area when backing into vegetation. Tall grass, pesky weeds, and small brush are no match for these authentic Bush Hog® built cutters. Available in 5', 6', and 7' cutting widths, the BH200-2 Series Rotary Cutters are "Made in America" and designed to deliver superior performance in tough conditions, day after day, and year after year.

BH200-2 Series Features

- **Full-Length 10GA Strongbacks** under the cutter reinforce the entire structure adding strength where you need it most.
- **Rear Sideband Support Plates** add strength to the rear of the cutter when backing into material.
- **1/4" Skids** run half the length of the cutter to protect the sidebands and add strength and stiffness.
- **Rear Band** is continuously welded and curved to add strength and resist bending.
- **Formed Tailwheel Bracket** is fully welded to the deck providing superior strength during punishing vertical and horizontal loads.
- **Arched Struts** maintain rigidity from front to back, while the flexible link allows the cutter to follow land contours.
- **Smooth-top Deck** makes clean-up a snap.
- **Gearboxes** are put through the paces during custom-designed lab tests that mimic real-world conditions and obstacles like rocks and stumps, while hundreds of hours in field performance tests prove that these cutters are Bush Hog® Tough.
- **Lower Double Hitch Lugs** are welded to the strongbacks providing greater overall hitch and deck strength.
- **Laminated Tailwheels** are puncture-proof and caster effortlessly through all kinds of terrain.



BH200 SERIES SINGLE-SPINDLE SPECIFICATIONS

| MODELS: | BH215-2 | BH216-2 | BH217-2 |
|------------------------|--|--------------------|----------------------|
| Cutting Width | 60" | 72" | 84" |
| Cutting Height | 2" - 12" | | |
| Cutting Capacity | 2" | | |
| Hitch Type | Cat. 1 Std & QH Compatible; Cat. 2 Std Only with Optional Bushings | | Cat. 1 or 2 Std & QH |
| Deck Thickness | 11 Gauge | 10 Gauge | |
| Sidebands | 11 1/2" x 11 Gauge | 11 1/2" x 10 Gauge | 11 3/4" x 10 Gauge |
| Driveline | ASAE Cat 3 | | |
| Driveline Protection | Shearbolt or Slip-Clutch | | Slip-Clutch Standard |
| Gearbox Rating (PTO) | 65 | | 130 |
| Tractor PTO Speed | 540 | | |
| Minimum Tractor PTO HP | 25 | 30 | 50 |
| Blade Holder | Oval | | |
| Blades | 1/2" x 4" Uplift | | |
| Blade Tip Speed (FPM) | 14335 | 14963 | |
| Tires | 15 1/2" Laminated | | |
| Safety Shielding | Front and Rear Deflectors or Chains | | |
| Approximate Weight | 655 lb. | 804 lb. | 1,036 lb. |
| Warranty | 10 Year Gearbox Limited Warranty 1 Year Machine Limited Warranty | | |
| Color | Available in Red, Green, Orange, Blue | | |

BH300-2 SINGLE-SPINDLES

BH300-2 SERIES
ROTARY CUTTERS

BH315-2 / BH316-2 / BH317-2



Powerful features to mow down tough vegetation!

The BH300-2 Series picks up where the BH200-2 Series trails off. Built with similar (but heavier-duty) design and features as the BH200-2 Series, the BH300-2 Series has larger gearboxes, stronger decks, full-length 7ga strongbacks, stronger sidebands and hitch structure. Heavy grass, weeds, and medium-sized brush and saplings are no match for these authentic Bush Hog® built cutters. Available in 5', 6' and 7' cutting widths, the BH300 Series Rotary Cutters are designed to deliver superior performance in tough conditions, day in and day out.

BH300 Series Features

- **Full-Length 7GA Strongbacks** under the cutter reinforce the entire structure adding strength where you need it most.
- **Taller Sidebands** allow more material and airflow under the deck increasing cutting volume and clipping efficiency.
- **Replaceable 1/4" Skids** run half the length of the cutter to protect the sidebands and add strength and stiffness.
- **Rear Band** is continuously welded and curved to add strength and resist bending.
- **Formed Tailwheel Bracket** is fully welded to the deck providing superior strength during punishing vertical and horizontal loads.
- **Arched Struts** maintain rigidity from front to back, while the flexible link allows the cutter to follow land contours.
- **Smooth-top Deck** makes clean-up a snap.
- **Lower Double Hitch Lugs** are welded to the strongbacks providing greater overall hitch and deck strength.
- **Gearboxes** are put through the paces during custom-designed lab tests that mimic real-world conditions and obstacles like rocks and stumps, while hundreds of hours in field performance tests prove that these cutters are Bush Hog® Tough.
- **Laminated Tailwheels** are puncture-proof and caster effortlessly through all kinds of terrain.



BH300 SERIES SINGLE-SPINDLE SPECIFICATIONS

| MODELS: | BH315-2 | BH316-2 | BH317-2 |
|------------------------|--|-----------|----------------------------------|
| Cutting Width | 60" | 72" | 84" |
| Cutting Height | 2" - 12" | | |
| Cutting Capacity | 3" | | |
| Hitch Type | Cat. 1 or 2 Std & QH | | Cat. 2 or 3 Std & QH |
| Deck Thickness | 10 Gauge | | |
| Sidebands | 11 1/2" x 1/4" | | 11 3/4" x 1/4" |
| Driveline | ASAE Cat 4 | | |
| Driveline Protection | Slip-Clutch | | |
| Gearbox Rating (PTO) | 130 | | |
| Tractor PTO Speed | 540 | | |
| Minimum Tractor PTO HP | 35 | 45 | 55 |
| Blade Holder | Round | | |
| Blades | 1/2" x 4" Uplift | | |
| Blade Tip Speed (FPM) | 14,600 | 15,000 | 14,450 |
| Tires | 15 1/2" Laminated | | Single or Dual 15 1/2" Laminated |
| Safety Shielding | Front and Rear Deflectors or Chains | | |
| Approximate Weight | 890 lb. | 1,050 lb. | 1,250 lb. |
| Warranty | 10 Year Gearbox Limited Warranty 1 Year Machine Limited Warranty | | |
| Color | Available in Red, Green, Orange, Blue | | |

BH400 SINGLE-SPINDLES

BH400 SERIES
ROTARY CUTTERS

BH416 / BH417

10
YEAR
GEARBOX LIMITED
WARRANTY

Bush Hog®'s Legendary Heavy-Duty Single-Spindles

Thick pastures, roadsides, gas and power line right-of-ways are no match for these authentic Bush Hog® built cutters. Available in 6' and 7' cutting widths, the BH400 Series Rotary Cutters are designed and built to take down virtually any unwanted vegetation. Whether you're a professional cutting every day or a weekend warrior tackling tough jobs on the farm, these cutters will be with you every step of the way.



BH400 Series Features

- **Strongbacks and Gearbox Stand** are located under the deck creating a smooth-top for easy cleaning.
- **Taller Sidebands** allow more material and airflow under the deck increasing cutting volume and clipping efficiency.
- **1/4" Skids** run half the length of the cutter to protect the sidebands and add strength and stiffness.
- **Rear Band** is continuously welded and curved to add strength and resist bending.
- **Gusseted Tailwheel Bracket** is reinforced in critical wear areas to provide increased strength and durability.
- **Arched Struts** maintain rigidity from front to back, while the flexible link allows the cutter to follow land contours.
- **Tubular-Style Hitch Components** resist bending and twisting even in the most extreme conditions.
- **Quick Hitch** compatibility allows for easier cutter attachment saving you time and energy.
- **Reinforced Tailwheel Casters** are designed to withstand extreme punishment, while the increased rolling radius of the 21" laminated tires casters effortlessly over uneven ground.
- **Heavy-Duty Gearboxes** are put through the paces during custom-designed lab tests that mimic real-world conditions and obstacles like rocks and stumps, while hundreds of hours in field performance tests prove that these cutters are Bush Hog® Tough.
- **Galvanized Models Available** with a 10 Year Deck Rust-Thru Limited Warranty.

BH400 SERIES SINGLE-SPINDLE SPECIFICATIONS

| MODELS: | BH416 | BH417 |
|------------------------|--|---------------------|
| Cutting Width | 72" | 84" |
| Cutting Height | 2" - 12" | |
| Cutting Capacity | 4" | |
| Hitch Type | Cat. 2 or 3 Std & QH | |
| Deck Thickness | 7 Gauge | |
| Sidebands | 13" x 1/4" | |
| Driveline | ASAE Cat. 6 | |
| Driveline Protection | 2-Plate Slip-Clutch | 4-Plate Slip-Clutch |
| Gearbox Rating (PTO) | 210 | |
| Tractor PTO Speed | 540 | |
| Minimum Tractor PTO HP | 60 | 70 |
| Blade Holder | Round | |
| Blades | 1/2" x 4" Uplift (5" Available) | 1/2" x 4" Uplift |
| Blade Tip Speed (FPM) | 13,997 | 14,488 |
| Tires | Single 21" Laminated | Dual 21" Laminated |
| Safety Shielding | Single or Double Row Chains | |
| Approximate Weight | 1,300 lb. | 2,000 lb. |
| Warranty | 10-Year Gearbox Limited Warranty and 1-Year Machine Limited Warranty; 10-Year Deck Rust-Thru Limited Warranty on Galvanized Decks | |

BH500 SINGLE-SPINDLES

BH500 SERIES
ROTARY CUTTERS

BH516



Bush Hog®'s Legendary Heavy-Duty Single-Spindle Rotary Cutters

Thick pastures, gas and power line right of ways, roadsides, even small forests are no match for these authentic Bush Hog® built cutters. Available in a 6' cutting width, the BH500 Series Rotary Cutters are designed and built to take down virtually any unwanted vegetation. Whether you're a professional cutting every day or a weekend warrior tackling tough jobs on the farm, these cutters will be with you every step of the way.

BH500 Series Features

- **Reinforced Strongbacks and Gearbox Stand** are integrated together and located under the deck creating a smooth-top for easy cleaning.
- **Taller Sidebands** allow more material and airflow under the deck increasing cutting volume and clipping efficiency.
- **1/4" Skids** run half the length of the cutter to protect the sidebands and add strength and stiffness.
- **Rear Band** is continuously welded and curved to add strength and resist bending.
- **Gusseted Tailwheel Bracket** is reinforced in critical wear areas to provide increased strength and durability.
- **Arched Struts** maintain rigidity from front to back, while the flexible link allows the cutter to follow land contours.
- **Tubular-Style Hitch Components** resist bending and twisting even in the most extreme conditions.
- **Quick Hitch** compatibility allows for easier cutter attachment saving you time and energy.
- **Reinforced Tailwheel Casters** are designed to withstand extreme punishment, while the increased rolling radius of the 21" laminated tires casters effortlessly over uneven ground.
- **Heavy-Duty Gearboxes** are put through the paces during custom-designed lab tests that mimic real-world conditions and obstacles like rocks and stumps, while hundreds of hours in field performance tests prove that these cutters are Bush Hog® Tough.
- **Welded Deck Ring** comes as standard equipment to add rigidity to the deck and reduce the possibility of blade deflection into the deck
- **Cross-Braced Blade Pan** is reinforced to withstand the rigors of harsh brush cutting and impact.
- **5" Wide Blades** chop through dense brush like a heavy axe.
- **Hex-Head Blade Bolts and Bushings** are hardened to provide extra durability and quick blade changes.
- **Galvanized Models Available** with a 10 Year Deck Rust-Thru Limited Warranty.



Hardened, hex-shaped blade bolts with mating hardened bushings and reinforced blade pans

| BH500 SERIES SINGLE-SPINDLE SPECIFICATIONS | |
|---|---|
| MODEL: | BH516 |
| Cutting Width | 72" |
| Cutting Height | 2" - 12" |
| Cutting Capacity | 5" |
| Hitch Type | Cat. 2 or 3 Std & QH |
| Deck Thickness | 7 Gauge |
| Sidebands | 13" x 1/4" |
| Driveline | ASAE Cat. 6 |
| Driveline Protection | 4-Plate Slip-Clutch |
| Gearbox Rating (PTO) | 225 |
| Tractor PTO Speed | 540 |
| Minimum Tractor PTO HP | 70 |
| Blade Holder | Round |
| Blades | 1/2" x 5" Uplift |
| Blade Tip Speed (FPM) | 13,436 |
| Tires | Single 21" Laminated |
| Safety Shielding | Double Row Chains |
| Approximate Weight | 1,775 lb. |
| Warranty | 10-Year Gearbox Limited Warranty and 1-Year Machine Limited Warranty; 10-Year Deck Rust-Thru Limited Warranty on Galvanized Decks |

Which Single-Spindle

ROTARY CUTTER

is right for you?

**SOMETIMES, CHOICES ARE AS TOUGH AS OUR ROTARY CUTTERS,
BUT DON'T WORRY - WE'RE HERE TO MAKE TOUGH JOBS SIMPLE.**



**OPEN HERE FOR A SIDE-BY-SIDE COMPARISON OF 'BUSH HOG'S'
SINGLE-SPINDLE MODEL FEATURES AND SPECIFICATIONS**





BUSH HOG® SINGLE-SPINDLE ROTARY CUTTERS

SPECIFICATION COMPARISON CHART

| | 5' SINGLE SPINDLES | | | 6' SINGLE SPINDLES | | | | | 7' SINGLE SPINDLES | | |
|---|-------------------------|-------------------------|---------------------|-------------------------|-------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| | BH115 | BH215-2 | BH315-2 | BH116 | BH216-2 | BH316-2 | BH416 | BH516 | BH217-2 | BH317D-2 | BH417 |
| CUTTING WIDTH (IN) | 56 | 60 | 60 | 68 | 72 | 72 | 72 | 72 | 84 | 84 | 84 |
| CUTTING HEIGHT (IN) | 2 - 11 | 2 - 12 | 1½ - 10½ | 2 - 11 | 2 - 12 | 1½ - 10½ | 2 - 12 | 2 - 12 | 1 - 10 | 1½ - 10½ | 2 - 12 |
| CUTTING CAPACITY (IN) | 1 | 2 | 3 | 1 | 2 | 3 | 4 | 5 | 2 | 3 | 4 |
| HITCH TYPE <small>SEE DETAILS ABOVE</small> | Cat 1 Std | Cat 1 Std & QH | Cat 1 or 2 Std & QH | Cat 1 Std | Cat 1 Std & QH | Cat 1 or 2 Std & QH | Cat 2 or 3 Std & QH | Cat 2 or 3 Std & QH | Cat 1 or 2 Std & QH | Cat 2 or 3 Std & QH | Cat 2 or 3 Std & QH |
| DECK THICKNESS (GA) | 12 | 11 | 10 | 12 | 10 | 10 | 7 | 7 | 10 | 10 | 7 |
| SIDEBANDS (GA) | 10 | 11 | 1/4" | 10 | 10 | 1/4" | 1/4" | 1/4" | 10 | 1/4" | 1/4" |
| SIDEBAND HEIGHT (IN) | 8 | 11½ | 11½ | 8 | 11½ | 11½ | 13 | 13 | 11½ | 11½ | 13 |
| DRIVELINE | Cat 3 | Cat 3 | Cat 4 | Cat 3 | Cat 3 | Cat 4 | Cat 5 | Cat 6 | Cat 4 | Cat 4 | Cat 6 |
| DRIVELINE PROTECTION | Shearpin or Slip-Clutch | Shearpin or Slip-Clutch | Slip-Clutch | Shearpin or Slip-Clutch | Shearpin or Slip-Clutch | Slip-Clutch | Slip-Clutch | 4 Plate Slip-Clutch | Slip-Clutch | Slip-Clutch | Slip-Clutch |
| GEARBOX RATING (PTO) | 60 | 65 | 130 | 60 | 65 | 130 | 210 | 225 | 130 | 130 | 210 |
| TRACTOR PTO SPEED | 540 | 540 | 540 | 540 | 540 | 540 | 540 | 540 | 540 | 540 | 540 |
| MINIMUM TRACTOR PTO HP | 20 | 25 | 35 | 25 | 30 | 45 | 60 | 70 | 50 | 55 | 70 |
| BLADE HOLDER | Oval | Oval | Round | Oval | Oval | Round | Round | Round | Oval | Round | Round |
| BLADES (IN) | 1/2 x 3 Uplift | 1/2 x 4 Uplift | 1/2 x 4 Uplift | 1/2 x 3 Uplift | 1/2 x 4 Uplift | 1/2 x 4 Uplift | 1/2 x 4 Uplift | 1/2 x 5 Uplift | 1/2 x 4 Uplift | 1/2 x 4 Uplift | 1/2 x 4 Uplift |
| BLADE TIP SPEED (FPM) | 15497 | 14335 | 14506 | 14307 | 14963 | 14861 | 13997 | 13346 | 14963 | 14375 | 14488 |
| TIRES | 14½" Laminated | 15½" Laminated | 15½" Laminated | 14½" Laminated | 15½" Laminated | 15½" Laminated | 21" Laminated | 21" Laminated | 15½" Laminated | 15½" Dual Laminated | 21" Dual Laminated |
| DEFLECTOR TYPE | Rubber/Metal | Rubber/Metal | Rubber/Metal | Rubber/Metal | Rubber/Metal | Chain/Chain | Chain/Chain | Double Row Chains | Rubber/Metal | Chain/Chain | Chain/Chain |
| APPROXIMATE WEIGHT (LB.) | 491 | 655 | 994 | 577 | 804 | 1171 | 1300 | 1775 | 1036 | 1517 | 2000 |
| GEARBOX WARRANTY (YRS) | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |



IF IT DOESN'T SAY
BUSH HOG®
IT JUST WON'T CUT IT™

2501 Griffin Avenue, Selma, Alabama 36703

Tel: 800-363-6096 | Fax: 334-874-2701



BushHog.com



CONTENT DISCLAIMER:

The products and information contained in this literature are subject to change without notice. Bush Hog® reserves the right to improve our products and make changes to specifications, designs, and standard equipment without notice. For additional product information, please visit Bush Hog®'s website or see your dealer for complete details.