




Maximus™ Disk

Model 100

Tillage versatility at its greatest

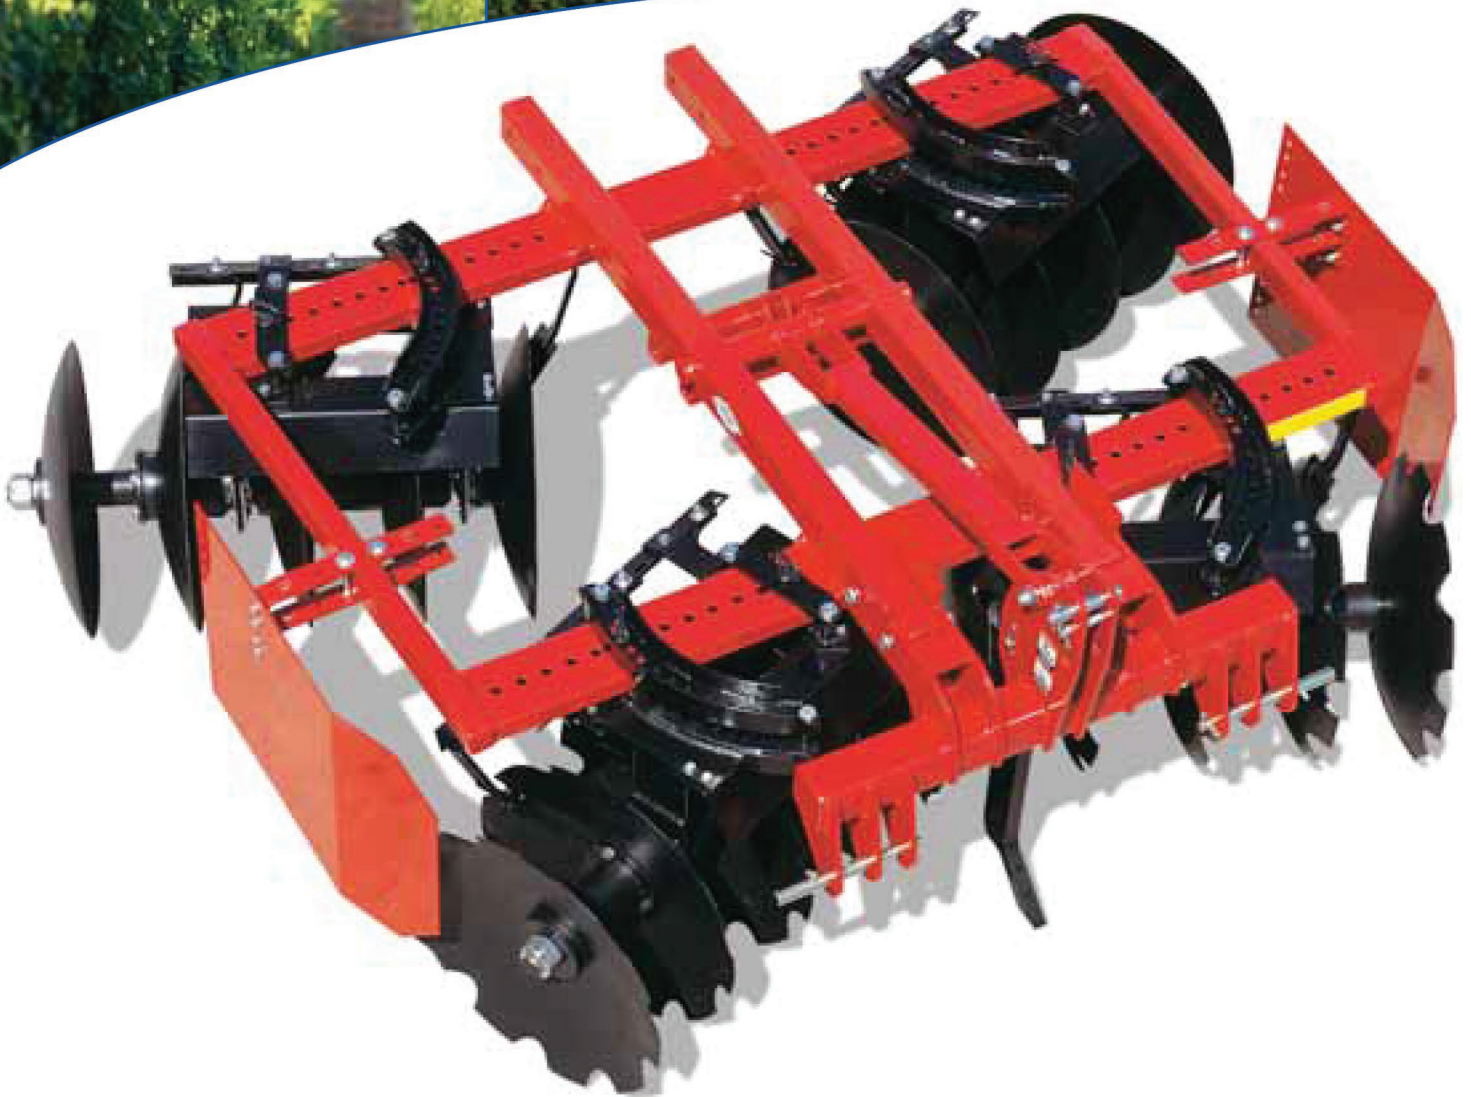

The word maximus is Latin for “the greatest”, and that’s why it was chosen for this unique disk. For maximum disk tillage in a variety of applications, including between orchard and vineyard rows, look to the Unverferth Maximus™ disk.

Unverferth Seedbed Tillage

Maximus™ Disk *Model 100*



Tool-free, cutting-angle adjustability



Blade scraper kit/triple-lip sealed bearings

1. Reversible, self-aligning hitch can be easily positioned to either the front or rear of the implement for greater versatility.
2. Both front and rear gangs feature tool-free, gang-positioning adjustability from the traditional X-shape to a diamond-shape to match the desired level of tillage aggressiveness and width.
3. Aggressively tills and penetrates soil between rows up to six inches deep for effective, efficient weed control and soil leveling.
4. Its heavy-duty 3"x3" and 2"x6" welded steel frame provides durability and consistent, uniform penetration.
5. Blades feature 9" spacings and are mounted on a 1¼" round shaft for maximum durability. Triple-lipped greaseable bearings with 10,800 lbs. of dynamic-load rating provide long life.
6. Disk blades are available in smooth or notched front/rear combinations to match your needs.
7. Tool-free adjustable working width in 2-inch increments from 5'3" to 7'3".
8. Powder-coat finish of implement red to resist corrosion.
9. Options:
 - the furrowing shovel can be positioned between the front gangs or the middle of the disk, and it's depth-adjustable with a simple pin setting
 - aggressive Rolling Harrow® basket, with angled, high-carbon-steel scalloped blades, finishes off weeds by knocking soil from roots and leaving them on the surface to wilt and die
 - blade scraper kit eliminates buildup, even in wet, sticky soil
 - width-adjustable side shields protect fragile fruit trees and grape vines
 - bolt-on blade extensions expand working width by 1'5"

Maximus™ disk specifications:

Horsepower required	5 h.p. to 9 h.p. per foot
Base unit working width	5'3" to 7'3" @ 18° gang angle
Base unit weight	1,800 lbs.
Working width with blade extension kit	6'8" to 8'8" @ 18° gang angle
Weight with extensions	2,018 lbs.
Number of blades	16 base unit 20 with extensions
Blade specifications	24" x ¼"
Cutting-angle adjustability	11 positions +29° to -29°
Working depth	up to 6"
Hitch types	category I, category II, category II quick hitch, category IIIN, category IIIN quick hitch



See your nearest Unverferth dealer today about the Maximus disk and the complete line of Unverferth tillage equipment, or check our Web site at www.umequip.com. Our roots are deep in tillage.

Unverferth.

P.O. Box 357 • Kalida, Ohio 45853
(419) 532-3121 • FAX (419) 532-2468
unverferth.com

©2005 Unverferth Manufacturing Co., Inc.
Printed in U.S.A.



®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH
Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon and Canada



Please remind all family members to use caution and follow recommended safety practices when around all farm equipment. Unverferth Mfg. Co., Inc. supports the efforts of Farm Safety 4 Just Kids.

UMD5051705.7M