



# NAV-500

## GUIDANCE CONTROLLER

Paired with any GFX series display, the NAV-500™ guidance controller is an affordable precision solution capable of receiving corrections from multiple GNSS satellite

constellations. Get sub-meter repeatable accuracy and full-farm coverage at a great price to use during tillage, broad-acre seeding, spraying and harvest.

### Key Features

- ▶ Low-profile rugged housing
- ▶ Trimble ViewPoint RTX™ corrections
- ▶ 5 satellite constellations
- ▶ Roll-corrected manual guidance
- ▶ Compatible with EZ-Steer® assisted steering system and EZ-Pilot® Pro steering system
- ▶ 4.1 Bluetooth®
- ▶ Multiple CAN ports

Housing & Mechanical	
Housing Material	Low-profile, chemical-resistant polymer casing
Size	7.1 in x 7.1 in x 2.9 in (180 mm x 180 mm x 74 mm)
Weight	22.6 oz (640 g)
Mounts	Universal Magnetic Mount

Power	
Power	9-16 VDC, 3.5 W

Connections	
To GFX Series Displays	M12 4-pin connector
For I/O	Deutsch 12-pin connector


Operational Range	
Operating Temperature	-30 C - +70 C
Storage Temperature	-40 C - +85 C
Humidity	100% Condensing
Ingress Protection	IP66

Communication and I/O	
Bluetooth	Bluetooth 4.1
Serial Ports	1 TX/RX, 1 TX only
CAN Ports	2
BroadR-Reach Port	1
Digital Out	Sonalert
Analog In	Remote Engage
NIMEA Output	1, 5, 10, Hz

Inertial Measurement Unit (IMU)	
Gyroscope	3-axis, 50 Hz
Accelerometer	3-axis, 50 Hz
External IMU Needed for EZ-Pilot Pro	57407-01

GNSS Receiver Specifications	
Constellations	GPS: L1 C/A
	GLONASS: L1 C/A, L1P
	Galileo: E1
	Beidou: B1
Satellite Corrections	QZSS: L1 C/A
	ViewPoint RTX™
	SBAS (WAAS, EGNOS, GAGAN, MSAS) SBAS +

Guidance	
Electric	EZ Pilot, EZ-Pilot Pro, EZ-Steer

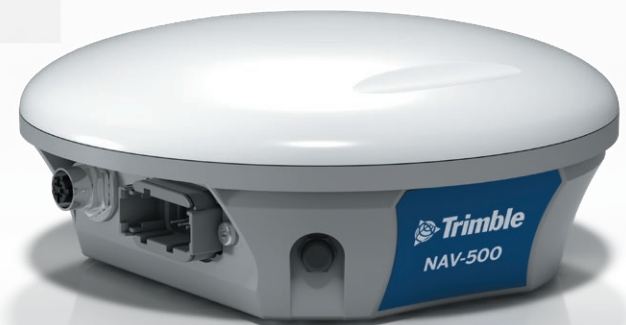

Contact your local Ag reseller today

#### NORTH AMERICA

Trimble Inc.  
10368 Westmoor Drive  
Westminster, CO 80021  
USA  
+1-720-887-6100 Phone  
+1-720-887-6101 Fax

Trimble Inc.  
Corporate Headquarters  
935 Stewart Drive  
Sunnyvale, CA 94085  
USA  
+1-408-481-8000 Phone  
+1-408-481-7740 Fax

#### EUROPE

Am Prime Parc 11  
65479 Raunheim  
GERMANY  
+49-6142-2100-0 Phone  
+49-6142-2100-140 Fax