



FASTRAK SERIES



FASTRAK

AVAILABLE DECK SIZES

Engine	Deck Sizes
22HP* - Kawasaki® FT691	48", 48"RD, 54", 54"RD
27HP* - Kohler® 7500 EFI	54", 60"
24HP* - Kawasaki® FT730	60"




FASTRAK SDX

AVAILABLE DECK SIZES

Engine	Deck Sizes
22HP* - Kawasaki® FX691	48", 54"
23.5HP* - Kawasaki® FX730	60"

FASTRAK

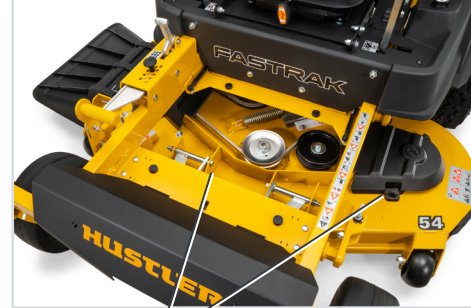

Easy Serviceability

Flip-up seat pan, removable floor pan and toolless removable pulley covers help make maintenance easy and simple.

Magnetic Top Pin Deck Lift System

Adjust the deck height between 1.5" - 4.5" with your foot.

Cast Deck Hangers

Cast deck hangers for durability.

Welded Steel Deck

Durable 10 ga. welded fabricated steel.

SmoothTrak™ Steering

Precision control designed to help trim and maneuver easily around obstacles without feeling unstable or jerky.

Transmissions


Serviceable Hydro-Gear® ZT-3200™

Dual Roto-Molded Fuel Tanks

8.5 gallon fuel capacity and dual mechanical fuel gauges.

Suspension Seat

High-back seat with suspension helps shield the operator from bumps and EVC Cushion to help relieve pressure off tail bone and lower back.

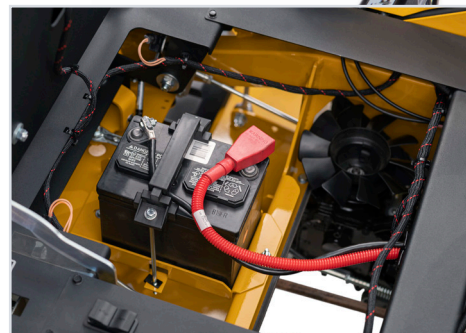

Clean design under seat

Helps provide airflow to aid in transmission cooling.

Commercial-Grade Kawasaki® FT Engine

With Vortical Air Filtration helps clean debris for long engine life.

LIMITED WARRANTY

4 YEAR | **750** HOUR


OTHER SERIES UPDATES



Front & Rear Tie Downs



Standard Dual USB Port

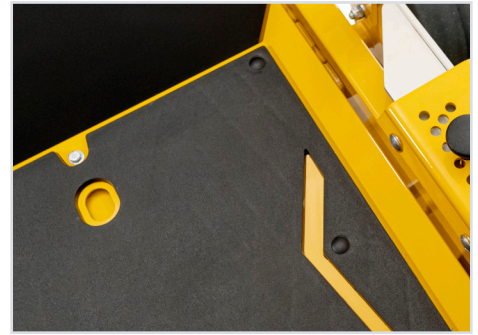

Standard Rubber Floor Mat

UPGRADES FOUND ON THE FASTRAK SDX

FASTRAK^{SDX}

- ✔ **Extra High-Back Suspension Seat[†]**
Higher backrest and more bolstered back cushion.
- ✔ **Kawasaki[®] FX Engine**
Full commercial remote canister air cleaner
- ✔ **Larger Transmissions[†]**
Hydro-Gear[®] ZT-3400[™]
- ✔ **More Warranty Coverage[†]**
Limited 4yr/1000hr compared to 4yr/750hr

[†]Compared to the Fastrak

SERIES ACCESSORIES

(Each sold separately)

- ▶ Mulch kit
- ▶ Dump from seat bagger (8 bushels)
- ▶ Grass bagger (2-bag powered 7.2 bushels)
- ▶ Mesh side bagger (3 bushels)
- ▶ Steel side bagger (3.5 bushels)
- ▶ Steering lever extension kit
- ▶ Flex Forks[®]
- ▶ Light kit
- ▶ Stripe kit
- ▶ High vacuum kit



FASTRAK		FASTRAK SDX
ENGINE		
Manufacturer	Kawasaki® FT series, Kohler® 7500 EFI	
HP	48", 48"RD, 54", 54"RD deck: 22HP* - FT691 54", 60" deck: 27HP* - 7500 EFI 60" deck: 24HP* - FT730 (Per SAE J1995)	Kawasaki® FX series 48", 54" deck: 22HP* - FX691 60" deck: 23.5HP* - FX730 (Per SAE J1995)
Displacement	48", 48"RD, 54": 726cc FT691 54", 60": 747cc 7500 EFI 60": 726cc FT730	726cc
Cooling	Air cooled	
Engine Warranty	3-year limited	
DRIVE SYSTEM		
Type	Dual hydrostatic	
Transmission	Hydro-Gear® ZT-3200™	Hydro-Gear® ZT-3400™
Speed	Up to 10 mph	Up to 10 mph
Parking Brakes	Integrated into steering levers	
DECKS		
Cutting Width	Side discharge: 48", 54", 60" • Rear-discharge: 48", 54"	Side discharge: 48", 54", 60"
Cutting Heights	1.5"- 4.5"	
Deck Lift	Foot operated	
Depth	5"	
Blades	3	
Blade Length	48", 48"RD: 16.50" 54", 54"RD : 18.50" 60" deck: 20.50"	48" deck: 16.50" 54" deck: 18.50" 60" deck: 20.50"
Blade Tip Speed	48", 48"RD: 18,600 • 54", 54"RD: 18,900 • 60": 18,400	48": 18,600 • 54": 18,900 • 60": 18,400
Spindles	Aluminum with 1" shafts and sealed ball bearings	
Drive	Electric PTO clutch	
Construction	Fabricated 10 ga.	
Spindle Mounts	Reinforced 11 ga.	
Impact/Trim Areas	11ga. formed channel with rolled edge	
CONSTRUCTION		
Frame	1.5" x 3" steel tubing	
Front Axle	Fabricated with sealed ball bearings	
Front Caster Wheels	Tapered roller bearings, grease-able	
Front Caster Forks	Fabricated 3/8" steel	
GENERAL		
Seat	High-back suspension seat	Extra High-back suspension seat
Fuel Capacity	8.5 gallons	
Cupholder	Yes	
Front Tire	13 x 6.5 - 6	13 x 6.5 - 6
Drive Tire	48", 48"RD: 23 x 9.5 - 10 BigBite™ 54", 54"RD, 60": 23 x 11 - 10 BigBite™	48": 23 x 9.5 - 10 BigBite™ 54", 60": 23 x 11 - 10 BigBite™
DIMENSIONS		
Weight	48": 910 lbs • 48"RD: 924 lbs • 54": 925 lbs 54"RD: 933 lbs • 60": 944 lbs	48": 910 lbs • 54": 925 lbs • 60": 944 lbs
Height	45.5" • 68.7 w/ ROPS up	
Length	76.7"	
Width w/Chute	48": 50" • 48"RD: 48.8" • 54": 55" • 54"RD: 54.8" • 60": 61.1"	48": 50" • 54": 55" • 60": 61.1"
Tire Width	48": 47.5" • 54" & 60": 51.5"	
Trim Side	48": 0.6" • 48"RD: 0.7" • 54": 1.6" • 54"RD: 1.6" • 60": 4.6"	
PRODUCTIVITY**		
Acres Per Hour	48" deck: 3.88, 54" deck: 4.36, 60" deck: 4.84	48" deck: 3.88, 54" deck: 4.36, 60" deck: 4.84

Specifications are subject to change without notice.

* As rated by the engine manufacturer.

** Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

Kawasaki is a registered trademark owned by KAWASAKI JUKOGYO KABUSHIKI KAISHA. Hydro-Gear is a registered trademark owned by Hydro-Gear Limited Partnership.