

TORO

SNOW BLOWERS

60V BATTERY / POWER CLEAR® SINGLE-STAGE / SNOWMASTER® / POWER MAX® TWO-STAGE / POWER TRX HEAVY-DUTY

FEAR NO STORM



AMERICA'S
#1
SNOW BLOWER
BRAND

†Based on average TraQline dollar share for snow blower market from 2013 - December 2022

60V^{MAX} FLEX-FORCE POWER SYSTEM[®]

EVERY SINGLE JOB. ONE SINGLE BATTERY.



POWER CLEAR[®]

Gives you the edge in speed, quality, and convenience.



60V POWER CLEAR[®] SELF-PROPEL POWER CURVE[®] TECHNOLOGY
Delivers a self-propelled experience with a ground engaging paddle powering through compacted snow with ease. *Select models.*



SNOWDRIFT STRENGTH
Bust through 2-9" of heavy, wet snow, throwing it up to 12 m / 40 feet.



CRUSH SNOW TO THE CURB
60V Flex-Force Power System[®] - one powerful battery system, 75+ unbeatable tools.



POWER MAX[®]

Three battery ports where the gas tank used to be.



POWER UP
All the features you love – Quick Stick[®] chute control, rugged 15" / 38 cm tires, anti-clogging system, and more.



GO THREE ROUNDS WITH OLD MAN WINTER
The only snow blower with three battery ports, this machine has all the power you need to get the job done right.



ZERO COMPROMISES
Same rugged, heavy-duty steel construction as Toro gas-powered snow blowers, with LED lights, hardened gears and no shear pins to break.



ONE POWERFUL BATTERY
INTERCHANGEABLE
75+ TOOLS

60V MAX* BATTERY SNOW BLOWERS

| | SINGLE-STAGE POWER CLEAR® 60V E21 | SP SINGLE-STAGE POWER CLEAR® 60V E21 | SNOWMASTER POWER CLEAR® 60V E24 NEW! | SNOWMASTER POWER CLEAR® 60V E24 NEW! | TWO-STAGE POWER MAX® 60V E24 | TWO-STAGE POWER MAX® 60V E24 | TWO-STAGE POWER MAX HA 60V E26 |
|---------------------|---|--|--|--|--|-------------------------------------|--|
| MODEL | 39901 | 39921 | 39914 | 39915 | 39924 | 39925 | 39926 |
| CLEARING WIDTH | » 21" / 53.3 cm | 21" / 53.3 cm | 24" / 61 cm | 24" / 61 cm | » 24" / 61.0 cm | » 24" / 61.0 cm | » 26" / 66.0 cm |
| CLEARING CAPACITY** | » Up to 12 parked cars | Up to 15 parked cars | Up to 20 parked cars | Up to 30 parked cars | » Up to 24 parked cars (12 cars per battery) Up to 15 cars more with additional 3rd battery | » Up to 20 parked cars | » Up to 30 parked cars (15 cars per battery) Up to 15 cars more with additional 3rd battery |
| SNOW CUT DEPTH | » 12" / 30.5 cm | 12" / 30.5 cm | 18" / 30.5 cm | 18" / 30.5 cm | » 20" / 50.8 cm | » 20" / 50.8 cm | 20" / 50.8 cm |
| BATTERY | » 1 x 7.5 ah | 1 x 7.5 ah + 1 x 2.5 ah | 1 x 10.0 ah | 1 x 10.0 ah + 1 x 5.0 ah | 2 x 6.0 ah | 1 x 10.0 ah | » 2 x 7.5 ah |
| CHARGE TIME | 180 min | 180 min | 300 min | 300 min | 150 min | 150 min | 180 min |
| THROWING DISTANCE** | » Up to 40' / 12.2 m | Up to 30' / 9.1 m | Up to 40' / 12.2 m | Up to 40' / 12.2 m | » Up to 45' / 13.7 m | » Up to 45' / 13.7 m | Up to 45' / 13.7 m |
| AUGER SYSTEM | Patent Pending Power Edge™ | » Power Curve® Self-Propel | » In-Line Two Stage | » In-Line Two Stage | » Power Max Anti-Clogging System | » Power Max Anti-Clogging System | Power Max Anti-Clogging System |
| AUGER DIAMETER | » 7" / 17.8 cm | » 8.5" / 21.6 cm | 10" / 25.4 cm | 10" / 25.4 cm | » 11" / 27.9 cm | » 11" / 27.9 cm | 11" / 27.9 cm |
| IMPELLER DIAMETER | - | - | - | - | 11" / 27.9 cm | 11" / 27.9 cm | 11" / 27.9 cm |
| AUGER GEARBOX | - | - | - | - | » Hardened Gears; No Shear Pins | » Hardened Gears; No Shear Pins | Hardened Gears; No Shear Pins |
| HANDLE | Adjustable | Ergonomic | » Personal Pace® | » Personal Pace® | Standard | Standard | » Heavy-Duty |
| DEFLECTOR | Locking | Locking | Single | Single | Single | Single | Single |
| CHUTE CONTROL | Quick Turn | Chute Mounted | » Quick Stick® | » Quick Stick® | » Quick Stick® | » Quick Stick® | Quick Stick |
| CHUTE CONSTRUCTION | Sub Zero Curved Chute | » High Capacity Chute | » High Capacity Chute | » High Capacity Chute | » Steel | » Steel | Steel |
| TIRES | 6 7/8" x 2" 17.5 cm x 5.1 cm | » 7" / 17.8 cm | » 11" / 27.9 cm | » 11" / 27.9 cm | » 15" / 38.1 cm | » 15" / 38.1 cm | 15" / 38.1 cm |
| HAND WARMERS | - | - | - | - | - | - | » Standard |
| LIGHT | Panoramic LED | Panoramic LED | - | Panoramic LED | LED | LED | LED |
| WARRANTY*** | 2-Year Limited, 3-Year Battery | 2-Year Limited, 3-Year Battery | 2-Year Limited, 3-Year Battery | 2-Year Limited, 3-Year Battery | 3-Year Limited, 3-Year Battery | 3-Year Limited, 3-Year Battery | 3-Year Limited, 3-Year Battery |
| BARE TOOL MODEL # | 39901T | 39921T | - | 39915T | - | - | 39926T |

» Enhanced or step-up feature

*Battery manufacturer rating = 60V maximum and 54V typical usage. Actual voltage varies with load. **Throw distance and clearing capacity will vary with conditions. ***See retailer for complete warranty details.



POWER SHOVEL®

Easy to maneuver, convenient, cordless
and complete snow clearing.

POWER CLEAR®

SINGLE-STAGE SNOW BLOWERS

Tackle small driveway, walkway and patio jobs in no time with Power Clear.

The perfect blend of power and efficiency to get the job done fast. Plus a compact design for easy storage leaves room in the garage for what matters most.

SURFACE TYPE MODERATE SLOPE CARS / DRIVEWAY



POWER CLEAR® SINGLE-STAGE

| | POWER CLEAR® 518 ZR/ZE | POWER CLEAR 721 R/E | COMMERCIAL POWER CLEAR 721 R-C | COMMERCIAL POWER CLEAR 821 R-C | POWER CLEAR 821 QZE |
|--------------------|---------------------------|--|--|---|--|
| MODEL | 38474 / 38475 | 38752 / 38753 | 38754 | 38755 | 38757 |
| CLEARING WIDTH | 18" / 45.7 cm | » 21" / 53.3 cm | » 21" / 53.3 cm w/ Extended Life Paddles | 21" / 53.3 cm w/ Extended Life Paddles | 21" / 53.3 cm |
| SNOW CUT DEPTH | 12" / 30.5 cm | » 12.5" / 31.2 cm | 12.5" / 31.2 cm | 12.5" / 31.2 cm | 12.5" / 31.2 cm |
| ENGINE | 99cc Toro Premium OHV | » 212cc Toro Premium OHV | 212cc Toro Premium OHV | » 252cc Toro Premium OHV | » 252cc Toro Premium OHV |
| DRIVE SYSTEM | Rotor Propelled | » Self-Propelled Power Propel™ | Self-Propelled Power Propel | Self-Propelled Power Propel | Self-Propelled Power Propel |
| STARTING | Recoil / Electric | Recoil / Electric | Recoil | Recoil | Electric |
| THROWING DISTANCE* | Up to 25' / 7.6 m | » Up to 35' / 10.7 m | Up to 35' / 10.7 m | » Up to 40' / 12.2 m | » Up to 40' / 12.2 m |
| AUGER SYSTEM | Power Curve | Power Curve | Power Curve | Power Curve | Power Curve |
| HANDLE | Standard | » Ergonomic | » Reinforced & Ergonomic Handle | Reinforced & Ergonomic Handle | Ergonomic |
| DEFLECTOR | Locking | Locking | Locking | Locking | Locking |
| CHUTE CONTROL | Chute Mounted | Chute Mounted | Chute Mounted | Chute Mounted | Quick Chute |
| TIRES | 6" x 1.5" / 15.2 x 3.8 cm | » 7" x 1.75" / 17.8 x 4.4 cm | 7" x 1.75" / 17.8 x 4.4 cm | 7" x 1.75" / 17.8 x 4.4 cm | 7" x 1.75" / 17.8 x 4.4 cm |
| WARRANTY** | | 2-Year Limited 2-Year Guaranteed to Start | 2-Year Limited Residential, 1-Year Limited Commercial 2-Year Guaranteed to Start Residential Only | | 2-Year Limited 2-Year Guaranteed to Start |

» Enhanced or step-up feature



Win Winter with America's #1 Snow Blower Brand

Power Clear single-stage snow blowers are loaded with big time power in a compact size. Its light weight and ergonomic handle make this powerhouse so easy to maneuver.

*Throw distance and clearing capacity will vary with conditions. **See retailer for complete warranty details.
†Based on average TraQline dollar share for snow blower market from 2013 – March 2021.

POWER CLEAR® SINGLE-STAGE

IDEAL FOR Driveways that can hold up to 9 cars and 2-9" / 5-23 cm of snow with limited garage storage



POWER TO BLAST THROUGH SNOW

Toro's powerful 4-cycle OHV engines give you the power to slice through snow in no time and throw it 40 feet/12 m.†



GET A MOVE ON

Keep moving to get done faster with self-propel Power Propel® system. The unique scraper pulls you through the snow. Select models.



SHREDS SNOW FAST

Efficiently shreds through snow while reducing clogging with the curved rubber paddles and housing of Power Curve® Technology.

POWER MAX® & POWER MAX® HD

TWO-STAGE SNOW BLOWERS

Take National Weather Service major winter storm warnings, chew 'em up and spit 'em out. Power Max and Power Max HD snow blowers are unbeatable in any storm.

Take control of big snow jobs this winter with Power Max and Power Max HD. These two-stage snow blowers clear wide paths with speed and ease.

SURFACE TYPE



MODERATE SLOPE



CARS / DRIVEWAY



Power Clear 821 QZE

252cc Toro Premium OHV Engine
Self-Propelled Power Propel®
21" / 53 cm Clearing Width



Power Max 826 OHAE

Hand Warmers Standard
Heavy Duty Handle Construction
26" / 66 cm Clearing Width

POWER MAX® COMPACT TWO-STAGE

| | POWER MAX 824 OE | POWER MAX 826 OAE | POWER MAX 826 OHAE |
|--------------------|----------------------------------|----------------------------------|----------------------------------|
| MODEL | 37798 | 37799 | 37805 |
| CLEARING WIDTH | 24" / 61.0 cm | » 26" / 66.0 cm | 26" / 66.0 cm |
| SNOW CUT DEPTH | 20" / 50.8 cm | 20" / 50.8 cm | 20" / 50.8 cm |
| ENGINE | 252cc Toro Premium OHV | 252cc Toro Premium OHV | 252cc Toro Premium OHV |
| DRIVE SYSTEM | Self-Propelled | » Triggerless Steering | Triggerless Steering |
| STARTING | Electric | Electric | Electric |
| THROWING DISTANCE* | Up to 45' / 13.7 m | Up to 45' / 13.7 m | Up to 45' / 13.7 m |
| AUGER SYSTEM | Power Max Anti-Clogging | Power Max Anti-Clogging | Power Max Anti-Clogging |
| AUGER DIAMETER | 11" / 27.9 cm | 11" / 27.9 cm | 11" / 27.9 cm |
| IMPELLER DIAMETER | 11" / 27.9 cm | 11" / 27.9 cm | 11" / 27.9 cm |
| AUGER GEARBOX | Hardened Gears, No Shear Pins | Hardened Gears, No Shear Pins | Hardened Gears, No Shear Pins |
| HANDLE | Standard | Standard | » Heavy-Duty |
| DEFLECTOR | Single | Single | Single |
| CHUTE CONTROL | Quick Stick® | Quick Stick | Quick Stick |
| TIRES | 15" / 38.1 cm | 15" / 38.1 cm | 15" / 38.1 cm |
| HAND WARMERS | - | - | » ✓ |
| LED LIGHT | - | » ✓ | ✓ |
| WARRANTY** | 3-Year Limited | 3-Year Limited | 3-Year Limited |



Power Max H

Commercial-Grade
All-Steel Construction
16" / 40.6 cm Tires



Power Max H

30" / 76 cm Clearing Width
302cc Toro Premium OHV Engine
Double Deflector
Hand Warmers Standard

**POWER MAX®
COMPACT
TWO-STAGE**

IDEAL FOR Larger driveways that can hold 6-14 parked cars and 6-20" / 15-50 cm of snow at a time



POWER UP

Optimal performance and years of dependable use with the 252cc Toro premium 4-cycle OHV engine.




TRIGGERLESS STEERING

No triggers to pull or levers to break! Turn the machine and the wheel intelligently disengages to assist you through for effortless turns.



CHUTE CONTROL

Quickly change the chute and deflector direction with a single, smooth motion thanks to the Quick Stick® chute control.

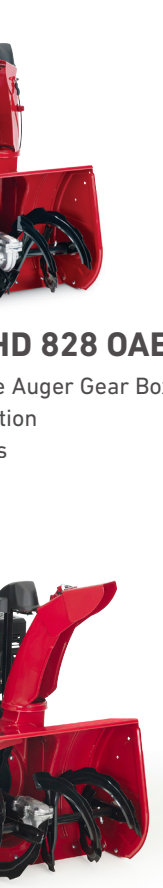

HD 828 OAE

Auger Gear Box
Position



HD 1030 OHAE

Auger Width
Premium OHV Engine

Standard

POWER MAX® HEAVY-DUTY TWO-STAGE

| | POWER MAX HD 828 OAE | POWER MAX HD 1030 OHAE | POWER MAX HD 1232 OHXE | COMMERCIAL POWER MAX HD 1428 OHXE | COMMERCIAL POWER MAX HD 1432 OHXE |
|---------------------------|------------------------------------|------------------------------------|------------------------------------|---|---|
| MODEL | 38838 | 38830 | 38842 | 38843 | 38844 |
| CLEARING WIDTH | 28" / 71.1 cm | » 30" / 76.2 cm | » 32" / 81.3 cm | 28" / 71.1 cm | » 32" / 81.3 cm |
| SNOW CUT DEPTH | 21" / 53.3 cm | 21" / 53.3 cm | 21" / 53.3 cm | 21" / 53.3 cm | 21" / 53.3 cm |
| ENGINE | 252cc Toro Premium OHV | » 302cc Toro Premium OHV | » 375cc Toro Premium OHV | » 420cc Toro Premium OHV | 420cc Toro Premium OHV |
| DRIVE SYSTEM | Triggerless Steering | Triggerless Steering | » Power Steering | Power Steering | Power Steering |
| STARTING | Electric | Electric | Electric | Electric | Electric |
| THROWING DISTANCE* | Up to 45' / 13.7 m | » Up to 49' / 14.9 m | » Up to 57' / 17.4 m | » Up to 60'+ / 18.3 m+ | Up to 60'+ / 18.3 m+ |
| AUGER SYSTEM | Power Max Anti-Clogging | Power Max Anti-Clogging | Power Max Anti-Clogging | Power Max Anti-Clogging | Power Max Anti-Clogging |
| AUGER DIAMETER | 14" / 35.6 cm | 14" / 35.6 cm | 14" / 35.6 cm | 14" / 35.6 cm | 14" / 35.6 cm |
| IMPELLER DIAMETER | 14" / 35.6 cm | 14" / 35.6 cm | 14" / 35.6 cm | 14" / 35.6 cm | 14" / 35.6 cm |
| AUGER GEARBOX | Commercial-Grade, No Shear Pins | Commercial-Grade, No Shear Pins | Commercial-Grade, No Shear Pins | Commercial-Grade, No Shear Pins | Commercial-Grade, No Shear Pins |
| HANDLE | Heavy-Duty | Heavy-Duty | Heavy-Duty | » Commercial | Commercial |
| DEFLECTOR | Single | Double | Double | Double | Double |
| CHUTE CONTROL | Quick Stick® | Quick Stick | Quick Stick | Quick Stick | Quick Stick |
| TIRES | 16" / 40.6 cm | 16" / 40.6 cm | 16" / 40.6 cm | 16" / 40.6 cm | 16" / 40.6 cm |
| HAND WARMERS | - | » ✓ | ✓ | ✓ | ✓ |
| LED LIGHT | ✓ | ✓ | ✓ | ✓ | ✓ |
| WARRANTY** | 3-Year Limited | 3-Year Limited | 3-Year Limited | » 5-Year Limited / 1-Year Commercial | 5-Year Limited / 1-Year Commercial |

POWER MAX® HEAVY-DUTY TWO-STAGE

IDEAL FOR Larger driveways that can hold up to 20 parked cars and 9-21" / 23-53 cm of snow at a time



NO SHEAR PINS!
No need to replace shear pins in the cold with Toro's hardened gears and commercial-grade auger gearbox.



PRECISION MOVES
Smooth, tight turns are a snap with power steering.



DOUBLE CHUTE DEFLECTOR
Place the snow with greater precision, such as right next to your fence line, or throw the distance with a double deflector.

POWER TRX HEAVY-DUTY

TRACKED TWO-STAGE SNOW BLOWERS

When a monster storm is roaring in, you need a beast of a snow blower to roar back.

Winter gets out of your way as you throw snow 60+ feet/18+ m. It all starts with a single-button, electric start. Our biggest engine for your snowiest jobs on long driveways, up slopes and through the teeth of winter.

SURFACE TYPE MODERATE SLOPE CARS / DRIVEWAY



POWER TRX HEAVY-DUTY TWO-STAGE

| | COMMERCIAL POWER TRX HD 1428 OHXE | COMMERCIAL POWER TRX HD 1432 OHXE |
|--------------------|--|--|
| MODEL | 38890 | 38891 |
| CLEARING WIDTH | 28" / 71.1 cm | » 32" / 81.3 cm |
| SNOW CUT DEPTH | 21" / 53.3 cm | 21" / 53.3 cm |
| ENGINE | 420cc Toro Premium OHV | 420cc Toro Premium OHV |
| DRIVE SYSTEM | » Self-Propelled Hydrostatic Transmission and Power Steering | Self-Propelled Hydrostatic Transmission and Power Steering |
| STARTING | Electric | Electric |
| THROWING DISTANCE* | Up to 60'+ / 18.3 m+ | Up to 60'+ / 18.3 m+ |
| AUGER SYSTEM | Power Max Anti-Clogging | Power Max Anti-Clogging |
| AUGER DIAMETER | 14" / 35.6 cm | 14" / 35.6 cm |
| IMPELLER DIAMETER | 14" / 35.6 cm | 14" / 35.6 cm |
| AUGER GEARBOX | Commercial-Grade, No Shear Pins | Commercial-Grade, No Shear Pins |
| HANDLE | Commercial | Commercial |
| DEFLECTOR | Double | Double |
| CHUTE CONTROL | Quick Stick® | Quick Stick |
| TIRES | Tracked | Tracked |
| HAND WARMERS | ✓ | ✓ |
| LED LIGHT | ✓ | ✓ |
| WARRANTY** | 5-Year Limited, 1-Year Commercial | 5-Year Limited, 1-Year Commercial |

Power TRX HD 1428 OHXE / 1432 OHXE

Self-Propelled Hydrostatic Transmission
Tracked Driven for Ultimate Performance
Commercial Grade All-Steel Construction
420cc Toro Premium OHV Engine




POWER TRX
HEAVY-DUTY
TWO-STAGE

IDEAL FOR Extra-large driveways, heavy accumulation and making quick work of 10"+ / 25.4 cm+ of snow



UNMATCHED STABILITY

Track driven allows you to handle the steepest slopes or dig into hard packed snow.



SMOOTH HANDLING AND LOW MAINTENANCE

Hydrostatic transmission allows for self-propelled operation with infinitely variable speed.



ADJUST WITH EASE

Push the Quick-Adjust auger housing lever to adjust your housing up for climbing and transport, flat to blow snow off a driveway or down to dig deep snow.



SNOWMASTER®

SNOW BLOWERS

Tear through the roughest snow and ice in record time.

Easy enough for anyone in your household to handle, and still powers through tough, end-of-driveway snow.

SURFACE TYPE MODERATE SLOPE CARS / DRIVEWAY



CORDED ELECTRIC

SNOW BLOWERS

Make small snow clearing jobs a snap.

An ideal choice for sidewalks, steps, decks and small driveways.

STEPS, DECKS AND SIDEWALKS

CARS / DRIVEWAY



| | SNOWMASTER® | |
|---------------------|------------------------------|------------------------------|
| | SNOWMASTER 724 QXE | SNOWMASTER 824 QXE |
| MODEL | 36002 | 36003 |
| CLEARING WIDTH | 24" / 61.0 cm | 24" / 61.0 cm |
| SNOW CUT DEPTH | 18" / 45.7 cm | 18" / 45.7 cm |
| ENGINE | 212cc Toro Premium OHV | » 252cc Toro Premium OHV |
| DRIVE SYSTEM | Self-Propelled Personal Pace | Self-Propelled Personal Pace |
| STARTING | Electric | Electric |
| THROWING DISTANCE** | Up to 40' / 12.2 m | » Up to 45' / 13.7 m |
| AUGER SYSTEM | In-Line Two-Stage | In-Line Two-Stage |
| AUGER DIAMETER | 10" / 25.4 cm | 10" / 25.4 cm |
| IMPELLER DIAMETER | 10" / 25.4 cm | 10" / 25.4 cm |
| CHUTE CONTROL | Quick Stick® | Quick Stick |
| TIRES | 11" / 27.9 cm | 11" / 27.9 cm |
| WARRANTY*** | 3-Year Limited | 3-Year Limited |

| | CORDED ELECTRIC | |
|-----------------------------|-------------------|---------------------|
| | POWER SHOVEL® | 1800 POWER CURVE® |
| MODEL | 38361 | 38381 |
| CLEARING WIDTH | 12" / 30.5 cm | » 18" / 45.7 cm |
| WEIGHT | 13 lbs / 5.9 kg | 26 lbs / 11.8 kg |
| THROWING DISTANCE** | Up to 20' / 6.1 m | » Up to 30' / 9.1 m |
| CHUTE CONTROL | - | » Quick Lever |
| DEFLECTOR | - | » Locking |
| DEPTH OF SNOW CUT, ONE PASS | 6" / 15.2 cm | » 10" / 25.4 cm |
| WARRANTY*** | 2-Year Limited | 2-Year Limited |

» Enhanced or step-up feature

**Throw distance and clearing capacity will vary with conditions.
***See retailer for complete warranty details.

FREE EXTRA YEAR ENGINE WARRANTY

on qualifying snow blowers with Toro engines when you purchase a maintenance kit.

Purchase of kit must be at same time as snow blower. Product must be registered to activate warranty extension. Offer applies only to snow blowers with Toro engines. For residential use only, not valid on commercial use. See dealer or toro.com for complete warranty details and maintenance kit compatible with snow blower purchased.



Maintenance Kit 138-0698

Single-Stage Models 38474, 38475

Maintenance Kit 138-0704

Two-Stage Models 38801, 38802, 38806, 38830, 38840, 38841, 38842

Maintenance Kit 138-0699

Single-Stage Models 38741, 38742, 38744, 38752, 38753, 38756, 38757

Two-Stage Models 36001, 36002, 36003, 37779, 37780, 37781, 37793, 37797, 37798, 37799, 37802, 38805, 38838

TORO®

490-0965NA ©2023 The Toro Company All Rights Reserved. Specifications subject to change without notice and without incurring obligation. Products depicted are for demonstration purposes only. Actual products offered for sale may vary in design, required attachments and safety features.